

# Fastrax Dome System

## Speed Dome Color Camera



**Fastrax II E**

### MAIN FEATURE

- 4.9-inch Acrylic bubble
- Up to 240 programmable preset positions
- Optional Manual/Auto Night shot and slow shutter function enhances
- Diagonal Scanning (Vector Scanning)
- Optional Indoor/Outdoor Pendant mount, ceiling mount, parapet mount and roof top mount
- Auto focus/Iris with Manual Override
- AC Line Lock
- Quick Detachable (Hot Swap)
- Data Up/Down load
- 8 Privacy Zone
- Easy DVR and multiplexer remote control
- 5" Color LCD keyboard

**SYSCOM**

# 26x/23x/22x/18x Optical Zoom Fastrax Dome System


## Specifications

MODEL	HID2404SSE11X	HID2404HCE11X	HID2404HNE11X	HID2404HTE11X	HID2404SME11X	HID2404SLE11/10X
<b>MODULE</b>						
<b>CCD Type</b>	1/4" Type Ex-view CCD	1/4" Progressive scan CCD	1/4" Type Super HAD CCD	1/4" Type Super HAD CCD	1/4" Type Ex-view CCD	1/4" Type Super HAD CCD
<b>Optical / Digital Zoom</b>	26X/12X	23X/10X	22X/11X	22X/11X	18X/12X	18X/12X
<b>Resolution (NTSC/PAL)</b>	480/470TVL	480/470TVL	480/470TVL	480/470TVL	480/470TVL	480/470TVL
<b>Focal length</b>	3.5mm~91mm	3.6mm~82.8mm	3.9mm~85.8mm	3.9mm~85.8mm	4.1mm~73.8mm	4.1mm~73.8mm
<b>Min. Illumination</b>						
-Normal	1.0 Lux	3.0 Lux	0.5 Lux	0.5 Lux	0.7 Lux	1.0 Lux
-Low Shutter (1/4(3)s)	0.07 Lux	0.2 Lux	0.02 Lux	0.02 Lux	0.1 Lux	-
-ICR on	0.15 Lux	-	-	-	-	-
-ICR on & Low Shutter	0.01 Lux	0.02 Lux	0.01 Lux	-	0.01 Lux	-
<b>Image Stabilizer</b>	NO	NO	NO	NO	NO	NO
<b>WDR</b>	NO	YES	YES	YES	NO	NO
<b>ICR on</b>	YES	YES	YES	NO	YES	NO
<b>DOME</b>						
<b>Panning angle (Optional)</b>	360° continuous rotation					
<b>Alarm (Optional)</b>	8 inputs (NC/NO), 4 relay outputs					/ NO(HID2404SLE10X only)
<b>Tilt angle</b>	-10° ~ 90°					
<b>Auto Scan</b>	1 auto pan & 8 auto scan capability					
<b>Preset</b>	240 presets with individual dwell time					
<b>Pattern</b>	4 patterns (recording up to 240 sec)					
<b>Tour</b>	8 tours (consist of 32 functions/1tour)					
<b>Max Speed</b>	380°/sec					
<b>Area Title</b>	it can be divided 16 areas with 16 characters of title					
<b>Privacy Zone</b>	8 privacy zone masking (2 methods selectable : mark / video off)					

\* Specifications are subject to change without notice \*


## MOUNT OPTIONS

### \* BASIC

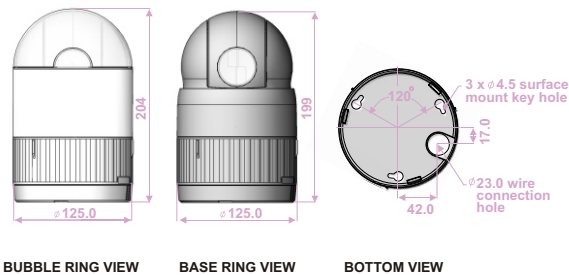

BUBBLE RING VIEW BASE RING VIEW BOTTOM VIEW


### \* INDOOR/OUTDOOR HOUSING

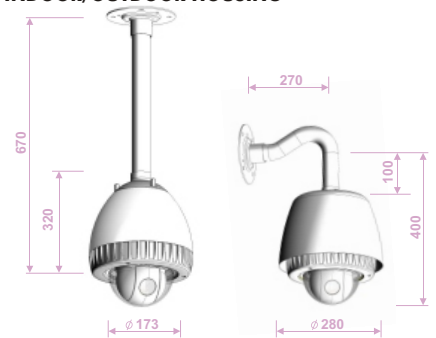

### \* PARAPET MOUNT & ROOF TOP MOUNT



### \* CEILING MOUNT

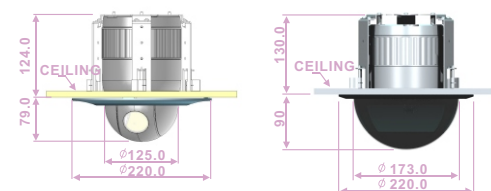

Unit : mm

## SPECIAL FEATURE

### Maximum 216~300zoom

optical zoom 18x, 22x, 23x, 26x and digital zoom 12x



### Preset positioning

240 preset positions (with different settings for pan, tilt, zoom and focus)



### Day and Night mode

intelligent selectable switching ICR (infrared cut filter)



### Privacy zone masking

8 privacy zone masking  
2 methods selectable : mark / video off

