


Stylish and Versatile Professional CCTV LCD Monitor

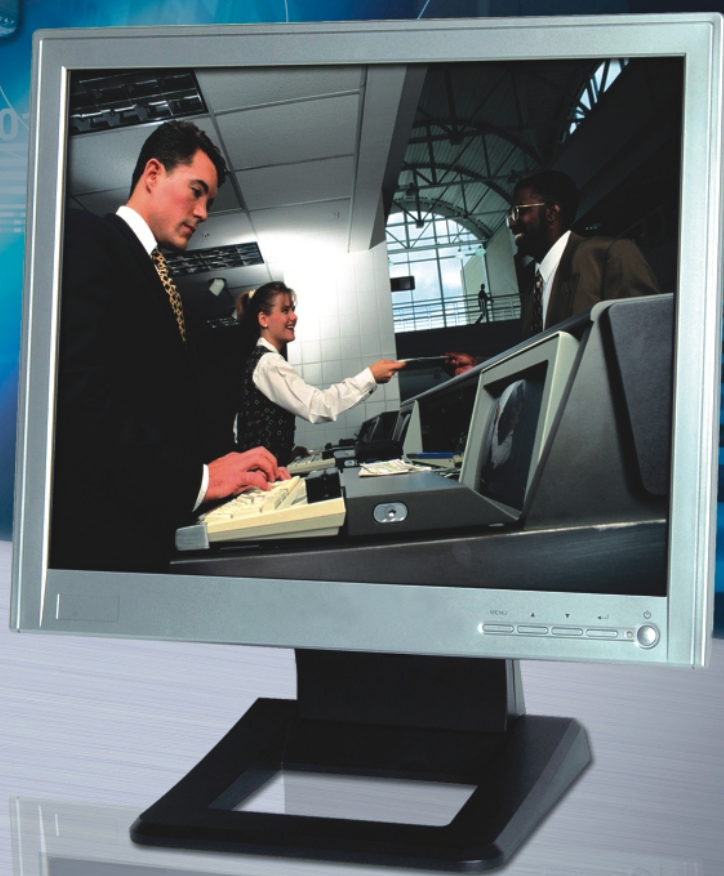

17"/19"

Professional LCD monitor Feature


- .. Professional CCTV LCD Monitor (Composite & PC) with the narrowest bezel
- .. Video (BNC & Y/C) and PC inputs for flexible integration into systems
- .. High Brightness & High Contrast ratio
- .. Long life Back light
- .. Exceptionally fast response time
- .. Excellent visibility with wide viewing angles
- .. Super Slim/Thin and lightweight
- .. On screen menus with a choice display in 5 languages
- .. Full set of Video Controls, Flexible Input connections
- .. Four 75mm pitch VESA wall mount compatible
- .. Outstanding desktop stand included

Elegant & Versatile Professional LCD screen 17"/19"


MODEL		HTM170FN/P	HTM190FN/P
DISPLAY			
LCD Panel		17.0 inches TFT LCD Panel	19.0 inches TFT LCD Panel
Active display area (Diagonal)		17.0 inches	19.0 inches
Pixel format		1280 (H) x 1024 (V) , RGB vertical stripe	
Pixel pitch		0.264mm x 0.264mm	0.294mm x 0.294mm
Color depths		8 Bit / 16.7M Colors	
Contrast ratio		1000 : 1 (Typical)	700 : 1 (Typical)
Brightness		300 cd/m2 (Typical)	
Viewing angles (Left/Right/Up/Down)		80°/80°/80°/80° (Typical)	80°/80°/80°/80° (Typical)
Light source / Lifetime		4CCFL / 50,000Hrs (Minimum)	4CCFL / 40,000Hrs (Minimum)
Response time (Tr/Td)		5ms	5ms
VIDEO			
Video Mode		NTSC/PAL (Auto selection)	
Video input signals	Composite	1.0Vp-p, 75Ω	
	S-video	0.7Vp-p(Luminance), 75Ω / 0.3Vp-p (Chrominance), 75Ω	
Video input connector	Composite	BNC x 2	
	S-video	4 Pin Mini-Din x 2	
Termination		75Ω , Auto termination	
Resolution		More than 500 Lines	
PC			
Input signal		Analog RGB (0.714 Vp-p, 75Ω) , H & V Sync(TTL)	
Input connector		15 pin D-sub	
Input resolution	VGA	640 x 480 60 ~ 75Hz	
	SVGA	800 x 600 56 ~ 75Hz	
	XGA	1024 x 768 60 ~ 75Hz	
	SXGA	1280 x 1024 60Hz	
Plug & Play		DDC 1/2B	
GENERAL			
User controls		Bright, Contrast, Tint, Color, Sharpness, etc	
OSD Language		English / French / German / Italian/ Spanish	
DC Power		12VDC +/-5%	
Dimensions	Unit	17" : 382.5 x 332 x 200 / 19" : 420 x 359.5 x 200	
	Packing	17" : 485 x 505 x 250 mm / 19" : 520 x 517 x 250 mm	
Weight	Unit / Packing	17" : 5.20Kg (Packing : 7.35Kg) / 19" : 5.55Kg (Packing : 7.85kg)	
Operating temperature		0 ~ 40°C	
Case material		Plastic	
Accessories		AC Adaptor, VGA Cable, Power Cord, Manual	

* Specifications subject to change without notice *

FRONT & REAR VIEW

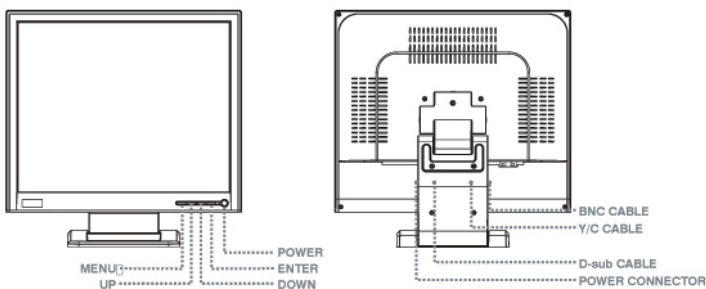

CONFIGURATIONS

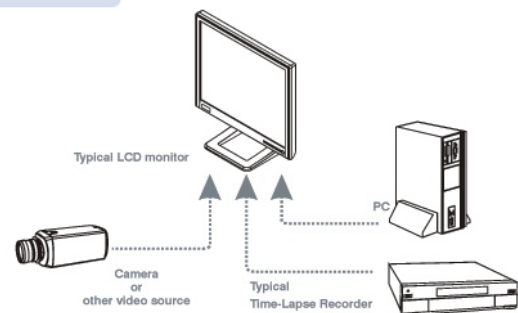

OPTIONAL PRODUCTS



Metal LCD Monitor 15", 17", 19"
HTM150C25L
HTM170C25S
HTM190C25S



Wide LCD Monitor Built-in 4ch Mux 23",32"
HMM230WBX
HMM320WBX

OPTIONAL ACCESSORIES

